



More trolleys from us for all kind of applications, load and heights and our mobile crane, MobiCrane. The trolleys are available in different sizes, executions and models. Available with lifting capacity up to 225 kg.

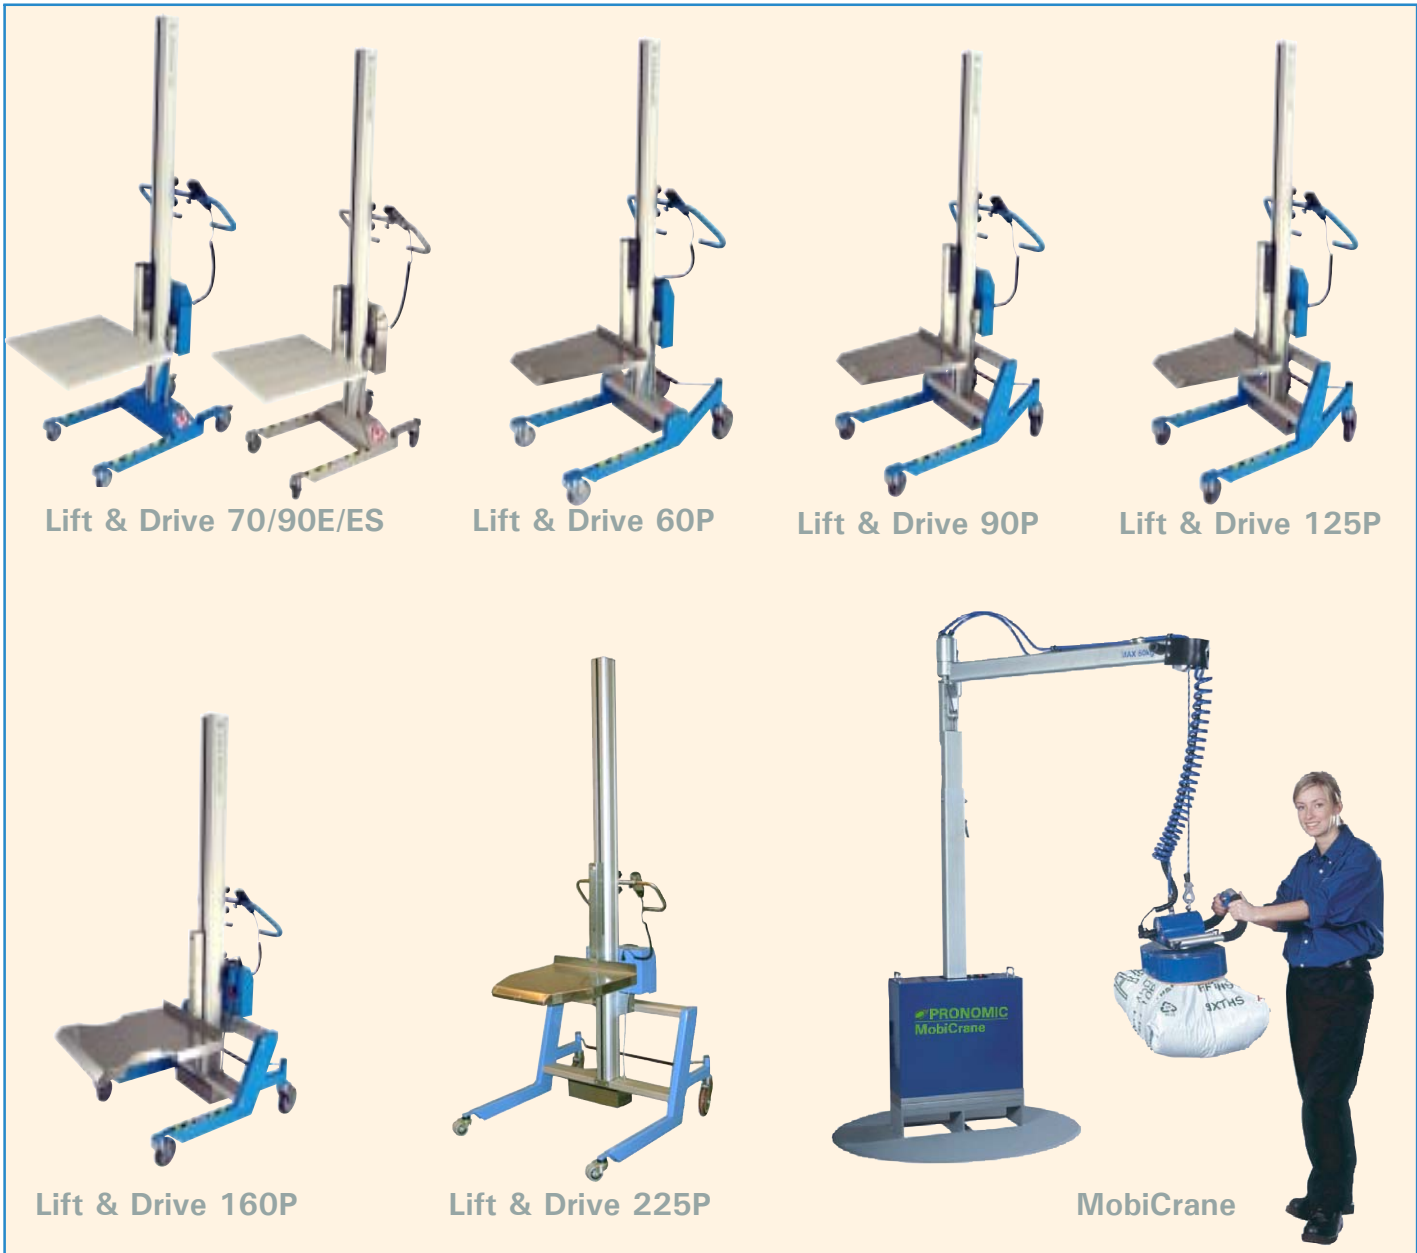

## Lift & Drive 90IE and 115IE

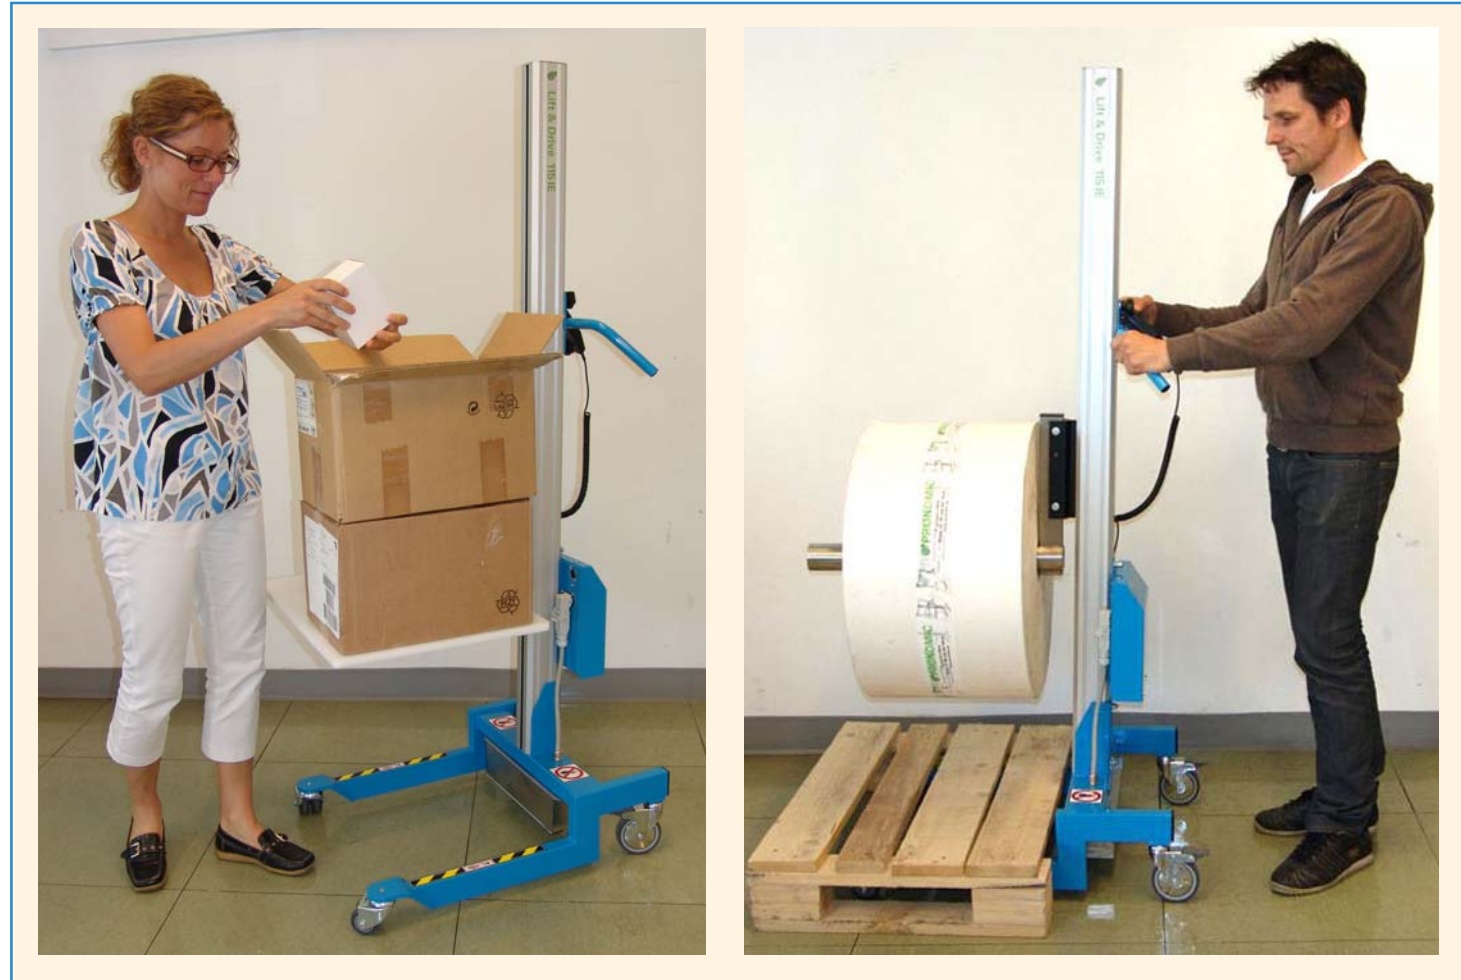

Our new Industrial Eco lifts, models 90IE and 115IE are the ideal lifters for many different applications within the industry.

With this type of lifter you easily increase the productivity and at the same time you create a better and safer working environment for the operator.

These lifters are very flexible, if needed you can easily get different lifting heights by selecting a taller lifting mast.



Apart from the standard lifting platform, there are a number of standard accessories available like prong and v-block for reel handling and forks for different types of boxes etc.

[www.pronomic.se](http://www.pronomic.se)

Represented by:

**SMEYERS-TU** NV/SA  
 Treft 61 / 3    B-1853 Strombeek-Bever  
 ☎ 02-461 21 09    ☎ 02-461 21 44  
[www.smeyers-tu.be](http://www.smeyers-tu.be)

90IE and 115IE lifters are very flexible, if needed you can easily get different lifting heights by selecting a taller lifting mast. The trolleys lifting capacity is 90 and 115 kg.

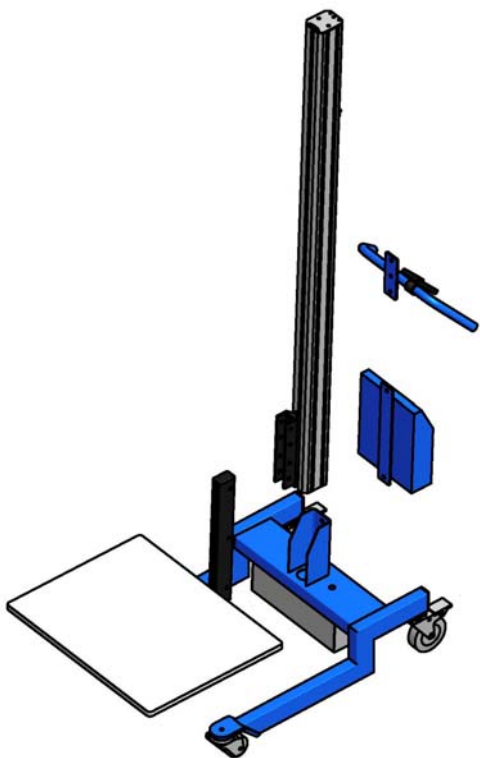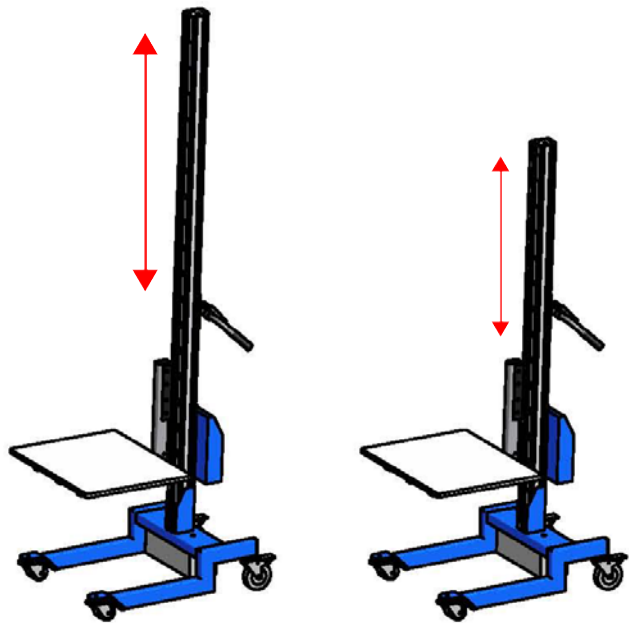

Standard accessories:




Platform



Prong



Fork and load platform

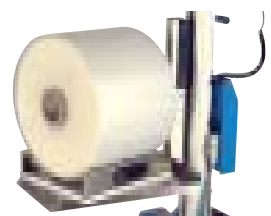


V-block and turn table for v-block



Lockable roll-on platform

Lift & Drive 90IE and 115IE

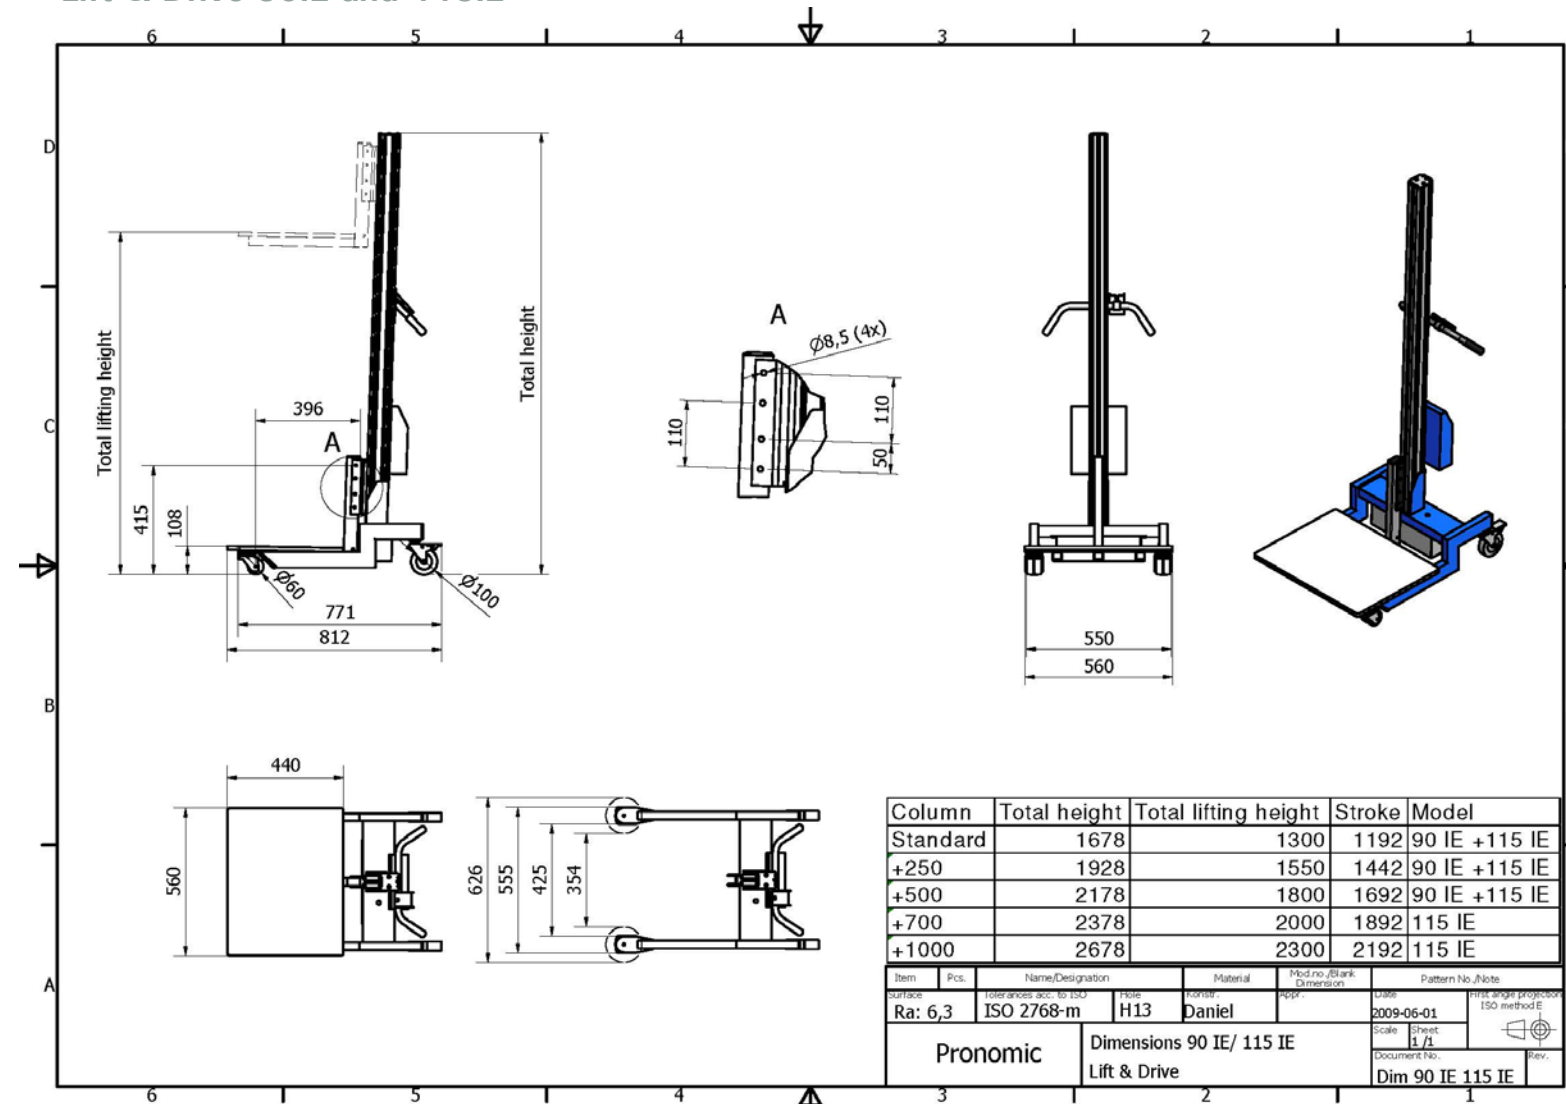


Technical specifications 90IE

Total height	1678, 1982, 2178 mm
Min lifting height	108 mm
Max lifting height	1300, 1550, 1800 mm
Stroke	1192, 1442, 1692 mm
Length (without load platform), standard	771 mm
Width	550 mm
Platform (LxB)	440x560 mm
Wheel diameter (front/rear)	60/100 mm
Max load	90 kg
Weight of unit	40 kg
Battery voltage	24 V
Battery capacity	7,2Ah
Charging voltage	230V AC 50 Hz or 115V AC 60 Hz

Technical specifications 115IE

Total height	1678, 1982, 2178, 2378 and 2678 mm
Min lifting height	108 mm
Max lifting height	1300, 1550, 1800, 2000 and 2300 mm
Stroke	1192, 1442, 1692, 1892 and 2192 mm
Length (without load platform), standard	771 mm
Width	550 mm
Platform (LxB)	440x560 mm
Wheel diameter (front/rear)	60/100 mm
Max load	115 kg
Weight of unit	40 kg
Battery voltage	24 V
Battery capacity	7,2Ah
Charging voltage	230V AC 50 Hz or 115V AC 60 Hz

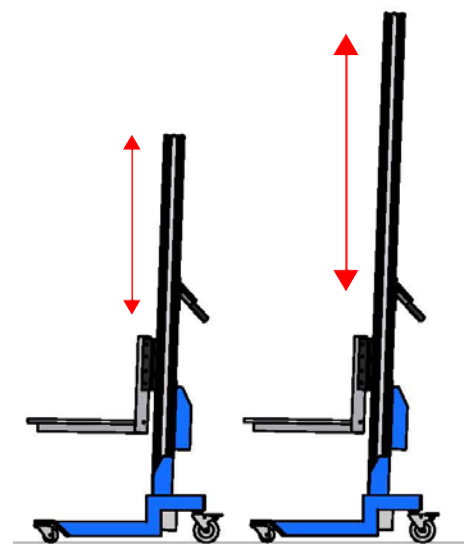

**SMEYERS-TU NV**  
 Treft 61 / 3 B-1853 Strombeek-Bever  
 ☎ 02-461 21 09 ☎ 02-461 21 44  
[www.pronomic-lift.be](http://www.pronomic-lift.be)