

Lift&Drive



Lift&Drive™ 130P

 PRONOMIC®

Lift&Drive 130P

quick, strong and adaptable

Lift&Drive 130P is our selfmanufactured quick, strong and very flexible lift trolley.

With a lifting speed of 7,6 sec/1000 mm it is one of the fastest lift trolleys on the market.

The trolley is built in modules, which means that you build it fully adapted to your needs.

130P is able to handle loads up to 130 kg and at the same time do more lifts and do it quicker thanks to the new motor.

130P is equipped with central brake and directional lock on the rear wheels, making


them maneuverable, quick and easy to turn sideways.

The mast are equipped with a screw drive, which makes it reliable, durable and require minimal maintenance. The colum are available in different heights.

To ensure maximal safety the trolleys possess a built-in release function, which serves as protection from crushing injuries and prevents the trolley from tipping over.

Lift&Drive 130P is very simple to use and easy to handle, they require only very little maintenance.

Module-based design - your requirements and working environment determine the final tool

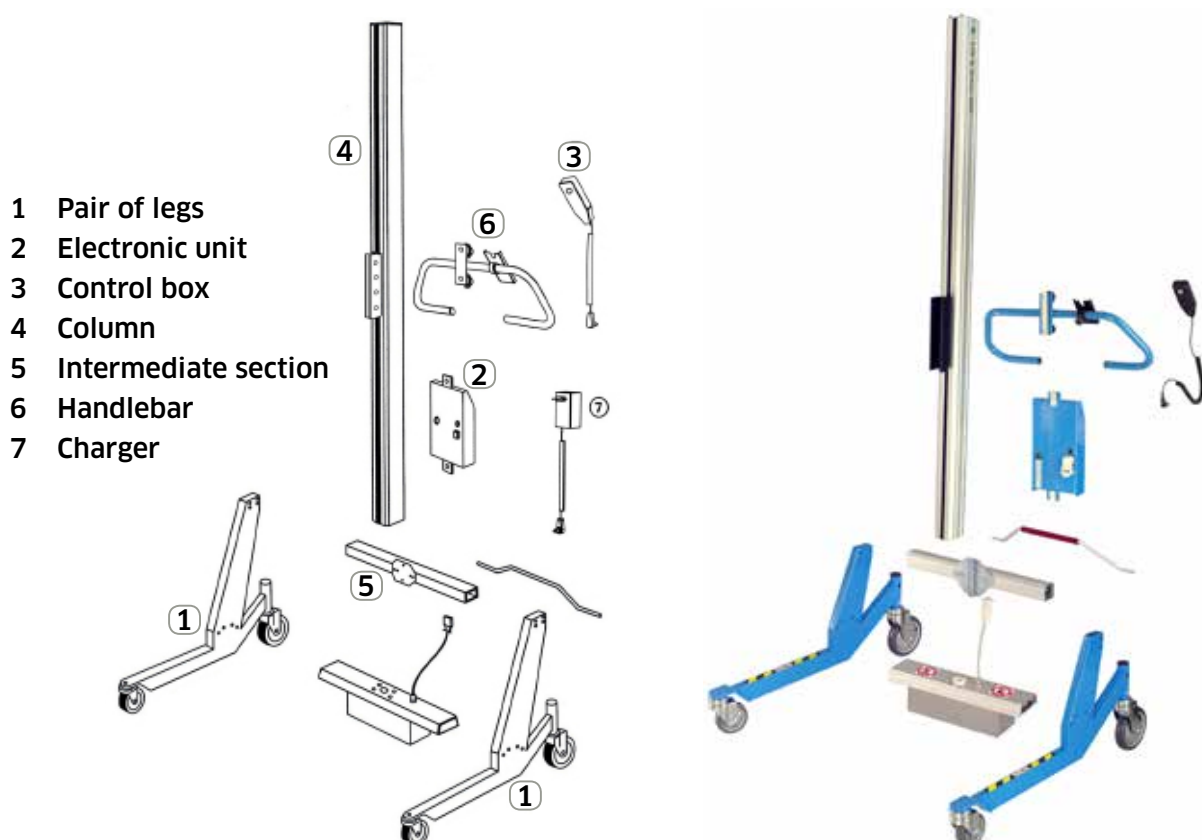

Accessories - standard or customized

We have a large number of standard tools such as load platform, forks, control and counting scale and Squeeze&Turn and our pneumatic expandable Expand& Turn. We also manufacture customized tools in accordance to your specifications.



Prong for roll handling



Fork



V-block




Roll platform, with side-feed



Squeeze&Turn



Scales



Expand&Turn -
Pneumatic expander,
turing operated electrically



Platform with edge rolls



Expand&Turn -
Pneumatic expander,
turing operated manually

Flexibility - choose mast height, and width & length of legs



Technical Specification for Lift&Drive, 130P

	Overall height, standard	Overall height, low built	Total lifting height, standard *	Total lifting height, low built *	Length of stroke
Standard	<u>1732</u>	<u>1682</u>	<u>1462</u>	<u>1412</u>	<u>1160</u>
+250	1982	1932	1712	1662	1410
+500	2232	2182	1962	1912	1660
+700	2432	2382	2162	2112	1860
+1000	2732	2682	2462	2412	2160
Minimum lifting height*	standard 302 mm, low 252 mm, extra low 242 mm				
Overall width	733 mm to 1573 mm				
Length (without loading platform) standard	810 mm				
Minimum width(outside)	550 mm				
Maximum width (outside)	1390 mm				
Wheel diameter (front/rear) standard, low-built	100/150, 60/100 mm				
Maximum load 130P	130 kg				
Dead weight	From 45 kg				
Battery voltage	24 V				
Battery capacity	12 Ah				
Charging voltage	230VAC/50Hz or 115VAC/60Hz				
Lifting height with max. load for 130P	10 sek/1000mm up. 7 sek /1000mm down				
Material	Chassis in powder-coated steel and in stainless steel				

Underlined values apply for standard trolley

* Measured on the lowest hole on the sled.

For further info
please contact your
sales representative.

SMEYERS-TU NV

Trefl 61/3 B – 1853 Strombeek – Bever
Tel. +32 (0)2-461 21 09 www.pronomic-lift.be
Fax +32 (0)2-461 21 44 info@pronomic-lift.be

PRONOMIC AB

info@pronomic.se
www.pronomic.se



©2016 Pronomic AB
All rights reserved.

All information quoted is believed to be
correct at time of print.
Pronomic reserves the right to alter product
specifications without prior consultation.

Lift&Drive 130P - ENG- 2016-04-13

 **PRONOMIC**[®]

